
## FUJIFILM



### PLATE PROCESSOR SOLUTIONS

The Latest in Water Wash Flexo Plate Processor Technology



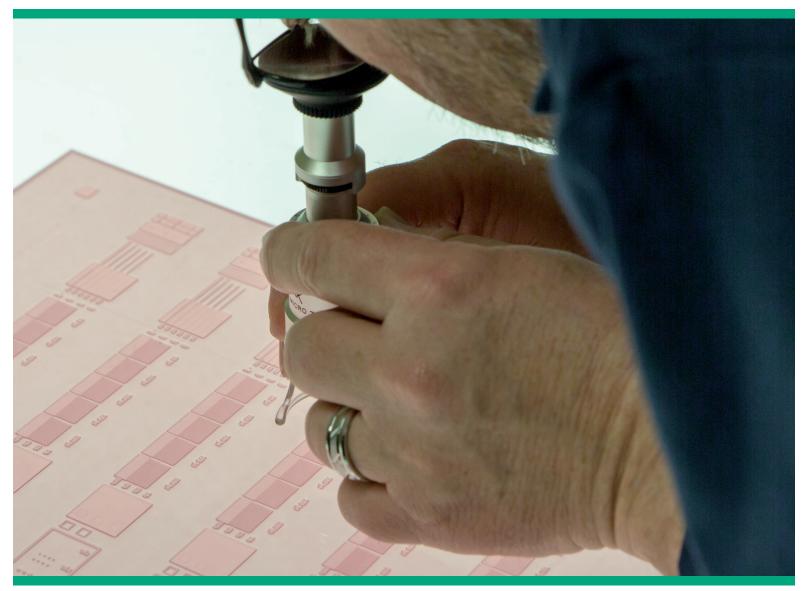

# Choose the exact technology to fit your flexo plate processing needs

### **C-TOUCH Clamshell Combination**

The C-TOUCH features an easy access clamshell design for the mounting and washing of plates. After being fixed to the top platen, the plate rotates orbitally over a fixed set of brushes. This back and forth orbital rotation allows for a thorough and clean dot reproduction. The all-in-one compact design includes pullout drawers for exposures (including HD), light finishing, and three dryer drawers with temperature control. The versatility of this stationed design produces an average of up to 5.5 plates per hour; with approximate washout times of 10 to 14 minutes. In combination with the Flenex FW plate, the C-TOUCH delivers the fastest plate-making time in the industry, routinely in under 45 minutes. The C-TOUCH is available in three models based on maximum plate size: 25" x 30", 30" x 40" and 36" x 48".

#### **S928B Internal Combination**

In the S928B, the washout section is internal to provide a very clean work area and simplified plate handling. The plate mounts on a plate holder where relief washout is obtained by the orbital movement of the brush heads under the brush frame. This all-in-one design has a small footprint and eliminates the need for large space requirements. It includes pullout drawers for exposures (including HD), light finishing, and three dryer drawers with temperature control. It will deliver approximately three plates per hour up to 36" x 48".





WATER FLEXOGRAPHY PROCESSOR EQUIPMENT											
Model	Processor Type	Maximum Plate Size (Inches/Centimeters)	Outside Dimensions (L x W x H*)	Weight (Lbs)	Filter Dimensions	Filtration Weight (Lbs)	Washout Time (Mins) **	Plates (Per Hour)**	Volts	Amps	Phase
C-Touch 25/30	Clamshell Combination	25" x 30" (63 cm x 76 cm)	59.8" x 49.2" x 74.8"	1,113	27.5" x 18.0" x 39.3"	100	10	5.5	230 vac	32 Amps	3 phase
C-Touch 30/40	Clamshell Combination	30" x 40" (76 cm x 102 cm)	78.0" x 51.2" x 74.8"	1,609	27.5" x 18.0" x 39.3"	100	12	4.5	230 vac	40 Amps	3 phase
C-Touch 36/48	Clamshell Combination	36" x 48" (91 cm x 122 cm)	86.6" x 57.0" x 82.6"	2,182	27.5" x 18.0" x 39.3"	100	14	3.5	230 vac	50 Amps	3 phase
S928B	Internal Combination	36" x 48" (91 cm x 122 cm)	131" x 72" x 70.8"	3,086	Internal Filter	N/A	17	3.0	230 vac	63 Amps	3 phase

\* Height with lid open

\*\* Will vary depending on artwork, plate thickness, relief and other job specific variables



FUJIFILM North America Corporation, Graphic Systems Division • Phone: 800.877.0555 • Email: contactgraphics@fujifilm.com • Web: www.fujifilmusa.com processor\_151007