



# Digital MWW

## Photopolymer Plates

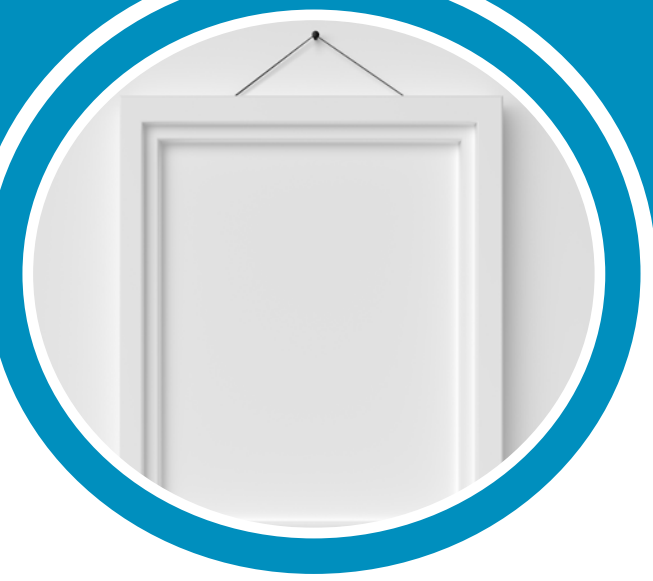

### A Plate Designed Specifically for Printing Whiter Whites

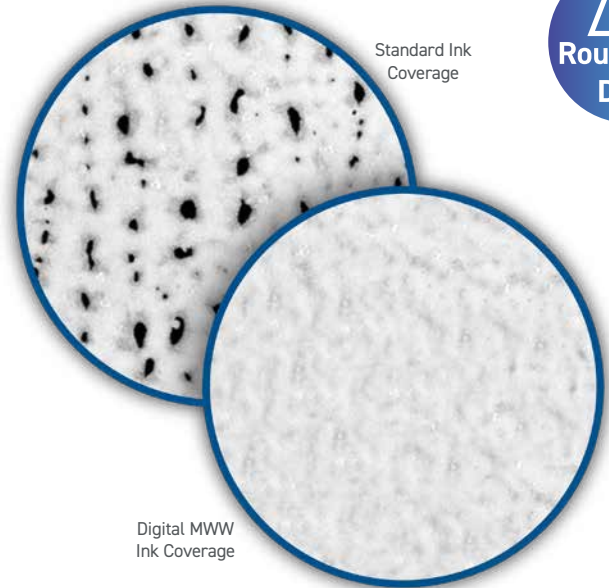


MacDermid's Digital MWW was designed for optimized white ink laydown, providing higher opacity, reduced mottle and improved over print performance. Digital MWW's formulation can be combined with the MacDermid LUX® process, along with specific advanced prepress screening techniques, to give a true step change in white ink laydown. This step change can also result in direct savings in ink, due to the ability to move from a two pass process to a single station of white ink.

When you need a plate that can take your white ink laydown to another level, count on the company that innovates with you in mind - **MacDermid**.

### FEATURES & BENEFITS

- Optimized formulation for enhanced ink transfer capability
- Can be used in combination with the MacDermid LUX process for even greater optimization of ink transfer.
- The resulting white ink laydown produces the following benefits:
  - High opacity
  - Low mottle
  - Brighter over print colors

### SEGMENTS

- Flexible Packaging 

Elevate Your Print to the Next Level

# Digital MWW

## Photopolymer Plates

### TECHNICAL SPECIFICATIONS

Digital MWW is available in thicknesses of 0.045 in (1 mm) up to 0.107 in (3 mm) and in sizes up to 52 in x 80 in (1,320 mm x 2,032 mm). Please contact your MacDermid representative for details.

### PLATE PROCESSING\*

Digital MCH can be processed with SOLVIT® M100, SOLVIT LO, or SOLVIT QD is recommended. Most other safe-solvent solutions may be used.

\*Processing times for any particular job and process are determined by equipment and other factors; consult your MacDermid representative for help in optimizing your plate processing.

### INK/SOLVENT COMPATIBILITY

When printed with solvent-based white inks, Digital MWW should only be used for a single print run. Repeat use may result in changes in print performance, and thus is not recommended.

### APPLICATIONS

Digital MWW is a digital sheet photopolymer for use in flexible packaging and other flexo markets that require white background printing; particularly targeting high opacity, low mottle, and brighter over print colors.

### RECOMMENDED PROCESSING CONDITIONS\*

GAUGE (mil/mm)	DUROMETER (Shore A)	DESIRED RELIEF (mil)	BACK EXPOSURE <sup>1</sup>		FACE EXPOSURE <sup>1</sup>		WASHOUT <sup>2</sup>	DRY TIME	POST EXPOSURE <sup>3</sup>	DETACK <sup>4</sup>
			(mJ/cm <sup>2</sup> )	(sec)	(J/cm <sup>2</sup> )	(sec)	(sec)	(min)	(min)	(min)
45/1.14	67	20/0.51	720	45	5	310	300	120	5	5
67/1.70	50	24/0.61	510	30	10	630	320	120	5	5
107/2.71	38	35/0.89	970	60	10	630	420	150	5	5

\*Contact your MacDermid representative for assistance in establishing proper processing conditions

1. Lamp intensity 16mW

2. Solvit M100 washout times

3. Lamp intensity 17mW

4. Lamp intensity 10mW



**MacDermid**

GRAPHICS SOLUTIONS

<http://graphics.macdermid.com>

©2019 MacDermid, Inc. All rights reserved.

DISTRIBUTED BY



All Printing  
Resources, Inc.

140 W LAKE DR, GLENDALE HEIGHTS, IL 60139  
1-800-445-4017 • WWW.TEAMFLEXO.COM